



BATH + LIGHT

RENEVA GATE TOP 30W

Reneva LED Gate Top Light

Outdoor Luminaire

Product Code:

LGTP01X030XW

30W - 2100lm - 3000K - CRI>70 Ra - Beam Angle - Asymmetric



Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	220-240 V AC
Rated Input Wattage	30W ± 10%
Rated Input Current	0.140 Amp (Nominal)
Power Factor	>0.90
ATHD	<10%
Rated Luminous Flux	2100 lm (tolerance as per BIS)
Rated Luminaire Efficacy	70 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Beam Angle	Asymmetric
Driver Efficiency	≥85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Top Canop Spun Aluminium and MS Housing with PU Paint
Lens / Reflector	Transparent Toughened Glass Diffuser
Mounting	Pole


Protections

Over Voltage Protection	360 V AC upto 20 min.
Surge Protection	±5.0KV
Protection Class	Class I
Ingress Protection (IP Rating)	IP65
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Product Dimensions (Dia. x H), Mounting Inner Dia.

Ø605 X 680 mm (Tol.± 5mm), Ø60 mm

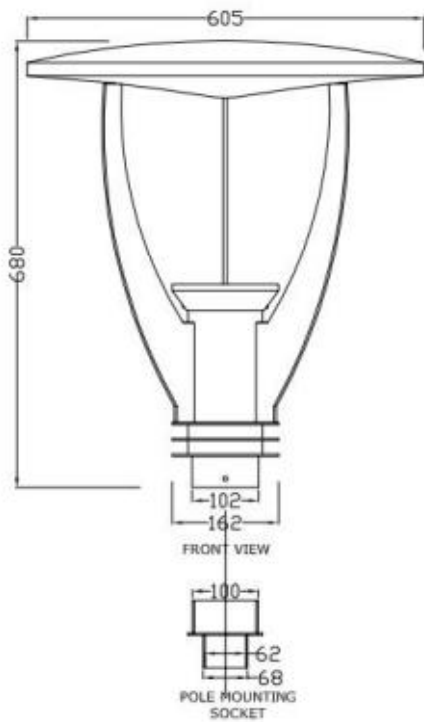

Applications

Residences, Offices, Hotels, Restaurants, Hospitals,
Street Lighting, Road Lighting, Campus Lighting and for other outdoor applications.