



ITS-WHT-89853S300PPPM


PRODUCT DETAILS

Manufacturer :	Jaquar	Type:	Automatic Rimless Floor Mounted WC
Colour:	White	Flush valves	Dual Flush - 4.2/6 LPF
Outlet	Vertical	Material:	White PP Seat Cover/ Ceramic Vitreous China
Technical Details:	BOM doc.NO.		JSW/05/2022/0170b
External diameter of outlet hole Ø 80 mm provide connector pipe product.			


ARTICLE NAME: WALL HUNG WC




TECHNICAL DIMENSIONS



TOP VIEW

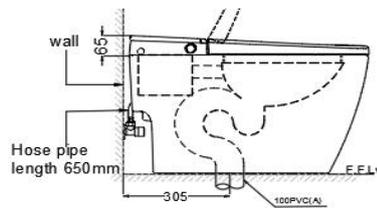

SIDE VIEW

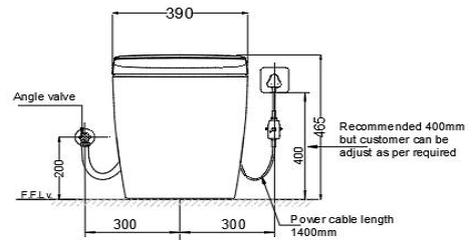

FRONT VIEW

PRODUCT SPECIFICATION

Dimension	390x685x465 mm	Rear / Front shower water flow	350-1000ml/Min
Material	White PP Seat Cover/ Ceramic Vitreous China	Heating mode	Instant heating
Flush Volume	Dule Flush-4.2/6 LPF	Adjustable water temperature	From 28°C-38°C
Net Weight	48.5kg	General heater power	1600W
Gross Weight	54kg	Safety device	temperature Controller,NTC.
Pit Distance	305	Air speed	≥4m/s
Installation Mode	Floor standing	Air temperature	About from room temperature to 55°C
Water Inlet	Inlet pipe is left side	General heater power	200W
Voltage	220V-240V~, 50-60Hz	Safety device for Water Heater	Temperature controller,NTC and thermal
Power Cord Length	1400 mm	Safety device for Seat	NTC and Thermal fuse
Water connection	Water pipe supply,G1/2thread	General heater power	50W
Water pressure requirment	0.7bar(dynamic)-7.5bar(static)	Rated power	1100 W (5°C)
Water supply temperature requirement	5-35°C	Environmental temperature requirement	0-40°C

FUNCTIONS/FEATURES

Adjustable Seat temperature, Dual Wash Function, Warm Air Dryer with Adjustable temperature, Adjustable water flow & temperature, Anti bacterial seat & nozzle, Remote Control, Instant Water heating, Auto deodorization, Night light,LED digital display,Spray Nozzle with Anti-bacteria and UV sterilization,Seat and cover Auto Open foot sensor.

ACCESSORIES PROVIDED

Electronic Bidet PP Seat Cover	ITS-WHT-89109
toilet sealing ring	ZPS-WHT-1401
Remote	ZPS-WHT-ST01A
Angle valve with filter	ZPS-WHT-ST59

CARE AND CLEANING GUIDELINES

- Vitreous china sanitary ware products are fragile in nature and need to be handled with care (to avoid personal injury) at all times during its storage, handling, installation and use thereafter.
- The product is heavy and it is recommended that two persons hold it while it is being fixed.
- Carefully inspect the new product for damage before installation.
- Risk of product damage. Over tightening may cause breakage or chipping of vitreous china.
- Risk of external leakage. Do not lift or rock the bowl after placement.
- Always test your cleaning solution on an inconspicuous area on the product before applying it to the entire surface.
- Do not allow cleaners to sit or soak on the product.
- Use a soft, dampened sponge or cloth to clean. Never use abrasive material like a bristle brush or scouring pad.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaners.
- Clean Chrome, stainless steel surfaces once a week. Do not use cleaners containing chloride on chrome, stainless steel. If used, rinse the surface immediately to prevent corrosion.
- Wherever chrome plating is used on the products, use only warm water to clean and then dry with a soft cloth.

DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. All dimensions are in mm (Tolerance ± 5 MM). Jaquar reserves the right to make the necessary amendments at any time without prior notice.