



## BATH + LIGHT

### ROMANTICA 10W

Romantica Pole Light

Outdoor Luminaire

Product Code:

350.PE8L10H.NGG

10W - 700lm - 3000K - CRI>70 Ra - Beam Angle - Asymmetric



### Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	220-240 V AC
Rated Input Wattage	10W ± 10%
Rated Input Current	0.050 Amp (Nominal)
Power Factor	>0.9
ATHD	<30%
Rated Luminous Flux	700 lm (tolerance as per BIS)
Rated Luminaire Efficacy	70 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Beam Angle	Asymmetric
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Die Cast Aluminium with Black Powder Coating
Lens / Reflector	Frosted Polycarbonate Diffuser
Mounting	Surface

### Protections


Over Voltage Protection	Withstand upto 300V (for 20 min)
Surge Protection	±2.0KV
Protection Class	Class I
Ingress Protection (IP Rating)	IP43
Impact Protection (IK Rating)	NA
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided



All technical data is subject to industry-standard tolerances.

## Product Dimensions (Dia..x H)

Ø250 X 2500 mm (tol.±5 mm)

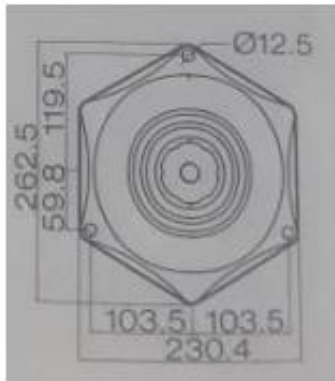

## Applications

Residences, Offices, Hotels, Restaurants, Hospitals,  
Street Lighting, Road Lighting, Campus Lighting and for other outdoor applications.