


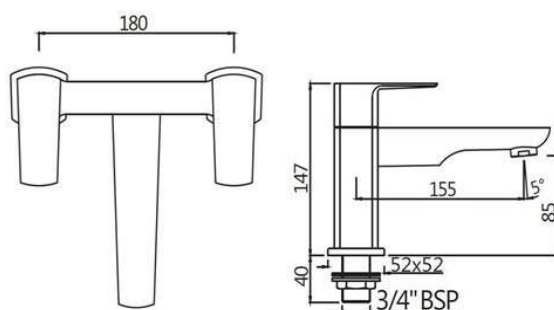

|                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Code</b>                                                                                                                                                                                                                                                                                                            | KUP-CHR-35223PM                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Description</b>                                                                                                                                                                                                                                                                                                             | H Type Bath Filler                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Flow Rate</b>                                                                                                                                                                                                                                                                                                               | 34.01 LPM @ 3 bar                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Recommended Water Pressure</b>                                                                                                                                                                                                                                                                                              | 0.5 Bar - 5 Bar                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Brass Specification in Percentage</b>                                                                                                                                                                                                                                                                                       | <p><b>Brass Ingots as per IS:1264-1997</b><br/>Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder)</p> <p><b>Brass Rod as per IS:319-1989</b><br/>Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder)</p> <p><b>Brass Sheets as per IS:410-1977</b><br/>Cu (61.5-64.5), Pb (0.0-0.3), Fe (0.0-0.075), Total Impurity (0.0-0.6), Zn (Remainder)</p> |
| <b>Cartridge Specification</b>                                                                                                                                                                                                                                                                                                 | <p>Fittings : Components have WRAS Approved for food grade conformity with Brass Housing and Spindle</p> <p>Life Cycle EN 200: 200,000 cycles (Standard)</p> <p>- 5.0 LAC Cycles as per EN 200*</p>                                                                                                                                                                                                                                                             |
| <b>Water Tightness</b>                                                                                                                                                                                                                                                                                                         | 16 bar (Pass)                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Pressure Resistance</b>                                                                                                                                                                                                                                                                                                     | 25 bar (Pass)                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Finish</b>                                                                                                                                                                                                                                                                                                                  | <p>Plating: Nickel-10.0 micron Chromium-0.3 micron</p> <p>Salt Spray (500 hrs + Validated)</p> <p>Adhesion (Pass)</p>                                                                                                                                                                                                                                                                                                                                           |
| <b>Aerator Size</b>                                                                                                                                                                                                                                                                                                            | WRAS, ACS Approved (28X1)                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Available Colour Finishing</b>                                                                                                                                                                                                                                                                                              | Antique Bronze (ABR), Antique Copper (ACR), Black Chrome (BCH), Black Matt (BLM), Graphite (GRF) & Stainless Steel Finish (SSF).                                                                                                                                                                                                                                                                                                                                |
| * As per in-house testing done on automatic life cycle testing machine made by Giussain, Italy                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/or countries. 10% variation in flow rate may be possible. Jaquar reserves the right to make the necessary amendments at any time without prior notice. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |